


# Mole Drains

Ehsan Ghane,  
Michigan State University



## 1. What are mole drains?

Mole drains are unlined tunnels (mole channels) in the clay subsoil formed by a mole plow (Figure 1). A mole plow is composed of a shank (leg) attached to a cylindrical torpedo foot followed by a cylindrical expander (Figure 2). The expander compacts the wall, helping the channel stay open longer. The process of pulling the mole plow results in soil cracks. The effectiveness of mole drains depends on the soil cracks that direct water to the mole channel.

A mole plow is similar to a subsoiler plow in that both loosen the soil and break up the plowpan and compacted surface layer, but unlike a subsoiler, a mole plow creates an intact channel for water flow.

This bulletin covers the reasons for installing, specifications, site suitability, installation timing, combining with subsurface drainage, life expectancy, and the benefits of mole drains.

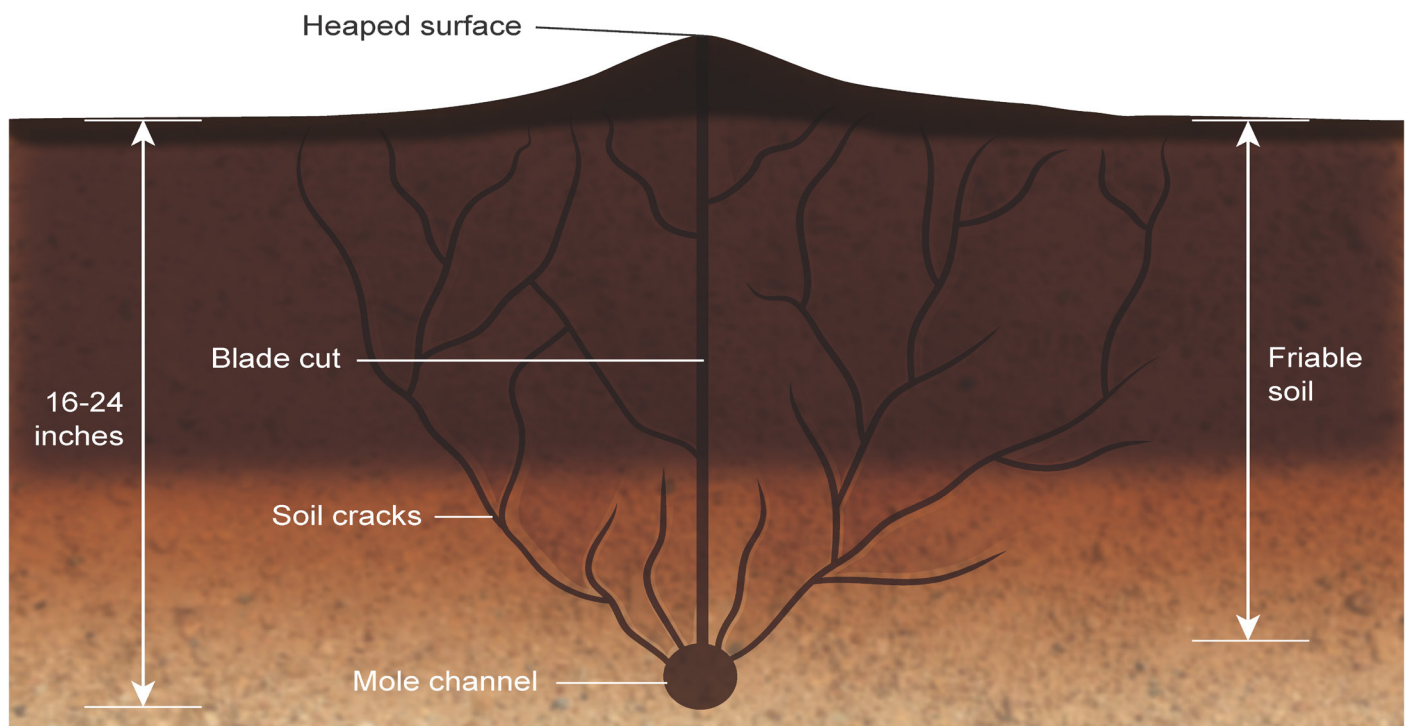


Figure 1- The process of pulling the mole plow results in soil cracks. Soil cracks facilitate water movement toward the mole channel.



## 2. Why install mole drains?

The following are the reasons why you may need to install mole drains:

- In soil where surface drainage is insufficient for addressing excess water problems and installing subsurface (tile) drainage is uneconomical due to low crop income, mole drains are an inexpensive means to drain excess water from the soil profile. An example location is the Upper Peninsula of Michigan.
- In heavy clay soil, mole drains remove excess water from the soil profile. Alternatively, mole drains can be combined with subsurface drainage to improve drainage performance in heavy clay soil (Section 6).
- When iron ochre is a temporary issue, mole drains can leach the soluble iron over the initial few years after installation. After the iron leaching has declined, install subsurface drain pipes. For more information about iron ochre, see Ghane (2025a).
- When impeded infiltration or percolation is a problem, the shank (leg) creates a blade-cut to break up the plow-pan and compacted surface layer (figures 2 and 3) (Ghane 2025b). Soil cracks created during moling improve infiltration, soil aeration, and water movement to the mole channel (Figure 4).



Figure 3- A tractor pulling a mole plow. The shank (leg) creates a blade-cut to break up the plow-pan and compacted surface layer to improve infiltration (Photo credit: Patrick Tuohy).



Figure 2- A mole plow is composed of a shank (leg) attached to a cylindrical torpedo foot followed by a cylindrical expander (photo credit: Patrick Tuohy).



Figure 4- After the tractor pulls the mole plow, soil cracks form to improve infiltration (Photo credit: Patrick Tuohy).



### 3. Specification of mole drains

The expander is typically one size larger than the torpedo foot. Common expander diameters range from 3 to 4 inches, with larger diameters used for deeper mole drains (Eggelsmann, 1978; Schwab, 1947). Mole drains are typically installed with 3-ft to 6-ft spacing (Figure 5). Since some of the channels will fail following installation, the final spacing will be wider. For example, installing at 6-ft spacing may result in a 12-ft final spacing, assuming some mole channels will fail. As a result, plan for closer initial spacing to achieve the desired final spacing.

The depth of the mole channel is usually between 16 and 24 inches. If tractor capacity or surface traction limits mole depth in heavy clay soil, start with a shallow mole depth, no shallower than 16 inches. As soil structure improves over time, mole depth can be increased to about 24 inches during future installations (Vlotman et al., 2020). Generally, mole depth should be as deep as possible for the channel to be placed in the plastic subsoil. If moling is combined with subsurface (tile) drainage, care should be taken to avoid cutting the plastic drain pipes (Section 6). Deep

moles last longer than shallow ones because they are less prone to damage by traffic, roots, animals, and shrinking and swelling of the soil.

Mole drains can be pulled in either direction, uphill or downhill (Hopkins 1947). The grade of the mole drains follows the slope of the land. A steeper land will have a steeper mole grade.

Mole length depends on soil type and land grade. Relatively flat fields require shorter mole lengths than steeper slopes. Generally, mole drains should not exceed about 300 ft in relatively flat fields and 600 ft in sloping fields to maximize longevity (Schwab, 1947). In some cases, longer mole lengths have been successful for several years (Hopkins, 2002). However, shorter mole lengths last longer.

If the mole channel flows into a ditch, make sure the mole outlet is far enough away from the bottom of the ditch to provide a continuous free flow (Hopkins, 2002). The mole outlet can be protected by inserting a 3- to 6-ft long piece of rigid pipe into the outlet to stabilize the channel and allow rat-guard installation (Vlotman et al., 2020) (Figure 6). The outlet must be regularly maintained to ensure proper drainage.



Figure 5- A mole drain with 4-ft spacing. Note that the 4-ft spacing may result in the desired spacing of 8 ft or wider assuming some of the mole channels will fail (Photo credit: Patrick Tuohy)

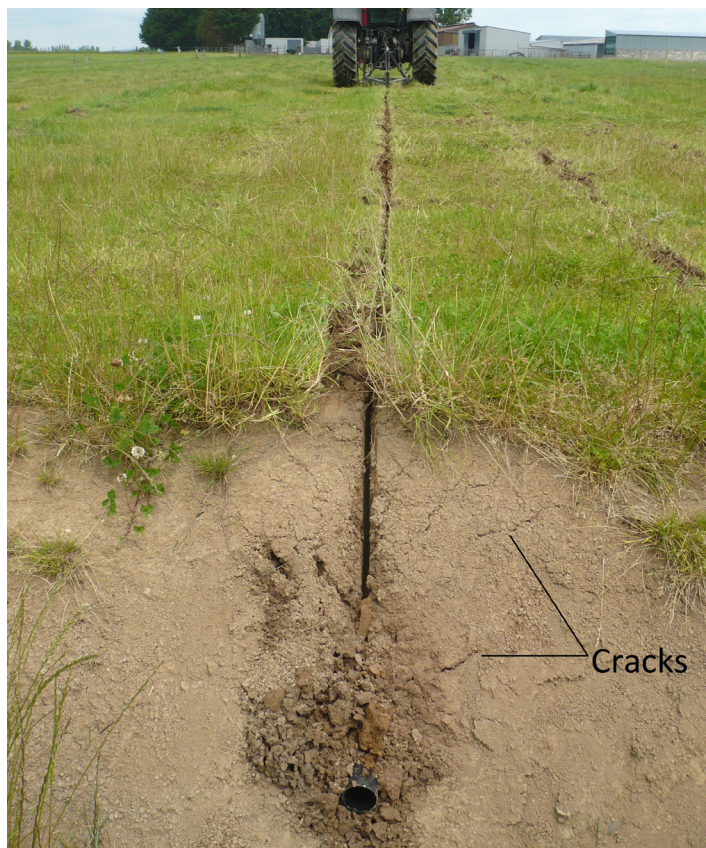



Figure 6- A rigid pipe at the outlet of a mole channel. Notice the soil cracks visible above the outlet (photo credit: Patrick Tuohy).



Mole drains are very suitable on uniformly sloped landscapes with slopes ranging from 0.2% to 3.0% because the grade of the mole drains follows the slope of the landscape. If the grade is too steep (>3.0%), erosion may occur in the mole drains. If there is not enough grade in the mole channel, water stagnation will weaken the walls and lead to early collapse. Irregular field slopes create uneven mole grades (Vlotman et al., 2020).



To determine if the soil is below the plastic limit, use a soil auger or shovel to grab a handful of the soil from the mole depth. If the soil sample has gravel, separate those larger than 2 mm as much as possible. Take a small sample of the soil (about the size of a peanut) and immediately roll it between your palm and a smooth surface (glass-like surface) to create a thread. Rolling should be done under the shade to avoid the sun drying the sample. If the larger thread breaks into shorter threads, continue rolling the shorter thread. If the thread crumbles into barrel-shape pieces at a diameter greater than 1/8 inch, the soil is dry enough for moling, that is, the soil is at or below the plastic limit (Figure 7). If the thread reaches 1/8 inch without crumbling, the soil is too wet for moling (ASTM D4318-17e1).

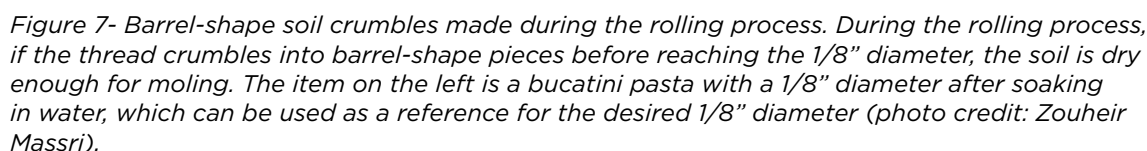




## 6. Combining mole drains with subsurface drainage

Mole drains can be installed as a stand-alone system or combined with subsurface drainage to improve drainage performance in heavy clay soil. When combined with subsurface drainage, mole channels can either drain into a ditch or a drain trench. Both methods can help alleviate compaction by breaking up the plow pan and compacted soil layer. Avoid moling under wet surface conditions, as it can cause soil compaction.

### 6.1. Mole channels empty into an open ditch

In the first method, mole channels empty into an open ditch (Figure 8). The mole channels serve two purposes: facilitating water movement toward the subsurface drain pipes and moving water toward the ditch. To avoid cutting through the existing subsurface drain pipes, keep at least a 4-inch distance between the bottom of the mole channel and the top of the drain pipes (Stuyt et al., 2005). When draining the mole channels into a ditch, the mole outlet needs to be maintained to allow continuous free flow.

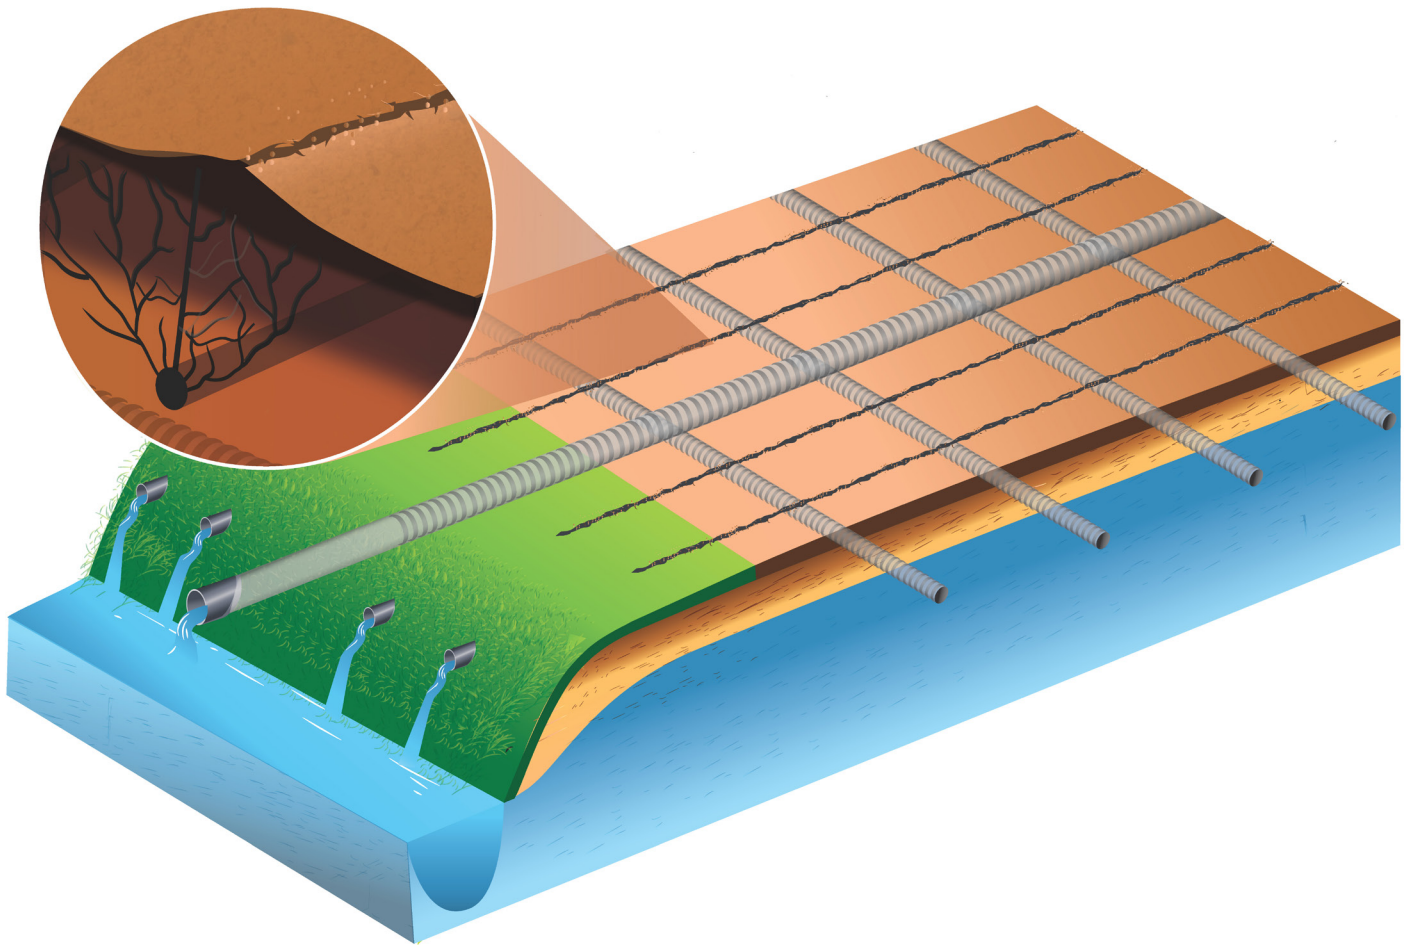

*Figure 8- In the first method, the mole channels empty into an open ditch because the landscape slopes toward the ditch. The mole channels create cracks in the soil that serve two purposes: facilitating water movement toward the drain pipes and moving water toward the ditch.*

## 6.2. Mole channels empty into a drain trench

In the second method, there is no open ditch adjacent to the field for the mole channels to drain into (Figure 9). In this case, install a collector drain trench with a gravel backfill through the lowest depressions of the field. Then, pull the mole plow through the drain trench such that the mole plow cuts through the gravel envelope without cutting through the drain pipe. Water moves from the mole channels into the gravel and then into the collector drain pipe. Then, the collector drain pipe carries water into the main pipe of the subsurface drainage system. The main pipe carries water into the county main pipe, or the main pipe carries water for some distance to reach the open ditch.

In very long fields, the mole channels may become too long to perform well if there is only one collector drain trench at the edge of the field to empty into. In this case, you may need more collector drain trenches in the field to empty into, so the mole lengths become shorter. The greater the number of drain trenches, the quicker the water removal.

Draining the mole channels into a gravel-filled drain trench has been shown to improve the performance of the drainage system in poorly permeable soil (Tuohy et al., 2018).



## 7. Life expectancy of mole drains

The lifetime of a mole drain depends on the soil's stability and the soil moisture at mole depth during installation. However, if mole drains are properly installed in suitable soil and moisture conditions, they can last beyond 5 years (Hopkins, 2002). Because performance declines over time, re-run mole drains every 3 to 5 years.



## 8. Benefits of mole drains

The primary benefit of mole drains is their low cost. Other benefits are improved soil physical properties and increased crop yield in heavy clay soil (Jha & Koga, 1995; Muirhead et al., 1996). When properly installed, mole drains create soil cracks that increase soil aeration, increase infiltration, and facilitate water movement toward the mole channels. Improved drainage promotes root growth and gradually improves soil structure (Hopkins, 2002; Vlotman et al., 2020).

Overall, mole drains should not be considered as merely a cheap version of subsurface drainage, but as a soil and drainage improvement practice (Vlotman et al., 2020).

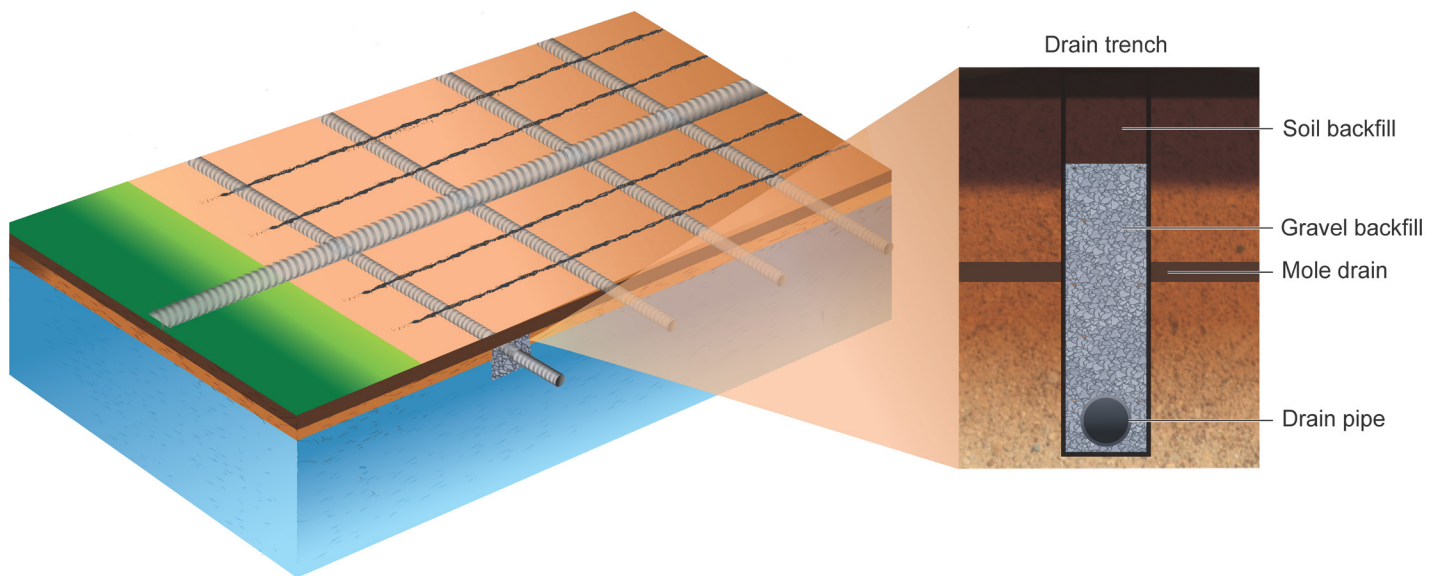


Figure 9- In the second method, the mole channel is intercepted by a gravel-filled trench with a drain pipe. The drain pipe empties water into a main pipe.

## 9. Summary and recommendations

Mole drains are a low-cost way to improve soil structure and drainage. The effectiveness of mole drains depends on the number of soil cracks that facilitate water movement toward the mole channels. Moling is very suitable in heavy clay soil with a minimum of 45% clay content and less than 20% sand at the mole depth.

Plan for closer initial spacing because some mole channels will fail over time. Since the mole drains' effectiveness decreases over time, re-run the mole drains every 3 to 5 years.

Mole drains can be combined with subsurface drainage to improve drainage performance in heavy clay soil. In one design, mole channels empty into a ditch. In the other design, mole channels empty into a gravel-filled trench with a drain pipe.

## Expert Reviewed

This bulletin has been reviewed by Dr. Patrick Tuohy (Research Officer, Teagasc, Environment Research Centre, Ireland), James Isleib (Crop Production Educator, MSU Extension), and Dr. Timothy M. Harrigan (Associate Professor, Michigan State University).

## References

- ASTM D4318-17e1. (2017). *Standard test methods for liquid limit, plastic limit, and plasticity index of soils*. ASTM International. <https://doi.org/10.1520/D4318-17e01>
- Eggelsmann, R. (1978). *Subsurface drainage instructions*. Verlag Paul Parey, Hamburg and Berlin.
- Ghane, E. (2025a). *Iron ochre* (E3453). Michigan State University Extension. [www.canr.msu.edu/drainage/index](http://www.canr.msu.edu/drainage/index)
- Ghane, E. (2025b). *Why do subsurface drainage systems underperform?* (E3451). Michigan State University Extension. [www.canr.msu.edu/drainage/index](http://www.canr.msu.edu/drainage/index)
- Hopkins, D. (2002). *Managing wet soils: Mole drainage*. State of Victoria, Department of Primary Industries, Australia.
- Jha, M. K., & Koga, K. (1995). Mole drainage: Prospective drainage solution to Bangkok clay soils. *Agricultural Water Management*, 28(3), 253-270. [https://doi.org/10.1016/0378-3774\(95\)01162-C](https://doi.org/10.1016/0378-3774(95)01162-C)
- Muirhead, W. A., Humphreys, E., Jayawardane, N. S., & Moll, J. L. (1996). Waterlogging and salinity are reducing the productivity of irrigated agriculture on clay. *Agricultural Water Management*, 30(3), 261-282. [https://doi.org/10.1016/0378-3774\(95\)01225-7](https://doi.org/10.1016/0378-3774(95)01225-7)
- Schwab, G. O. (1947). *Power requirements, limitations and cost of mole drainage in some Iowa soils*. [Thesis]. Iowa State College.
- Stuyt, L. C. P. M., Dierickx, W., & Martinez Beltran, J. (2005). *Materials for subsurface land drainage systems*. FAO Irrigation and Drainage Paper 60 Rev. 1. <https://www.fao.org/3/ah861e/ah861e00.htm>
- Tuohy, P. (2013). *Land Drainage: A farmers practical guide to draining grassland in Ireland*. Agriculture and Food Development Authority, Ireland.
- Tuohy, P., O'Loughlin, J., & Fenton, O. (2018). Modeling performance of a tile drainage system incorporating mole drainage. *Transactions of the ASABE*, 61(1), 169-178. <https://doi.org/10.13031/trans.12203>
- Tuohy, P., Humphreys, J., Holden, N. M., & Fenton, O. (2015). Mole drain performance in a clay loam soil in Ireland. *Acta Agriculturae Scandinavica Section B: Soil and Plant Science*, 65(1), 2-13. <https://doi.org/10.1080/09064710.2014.970664>
- Vlotman, W., Rycroft, D., & Smedema, L. (2020). *Modern land drainage* (2nd ed.). CRC Press, Taylor & Francis Group. <https://doi.org/10.1201/9781003025900>



Michigan State University Extension programs and materials are open to all without regard to race, color, national origin, gender, gender identity, religion, age, height, weight, disability, political beliefs, sexual orientation, marital status, family status or veteran status. Issued in furtherance of MSU Extension work, acts of May 8 and June 30, 1914, in cooperation with the U.S. Department of Agriculture. Quentin Tyler, Director, MSU Extension, East Lansing, MI 48824. This information is for educational purposes only. Reference to commercial products or trade names does not imply endorsement by MSU Extension or bias against those not mentioned. 1P-07:2026-WEB-EG/LG WCAG 2.0

Copyright 2025 Michigan State University Board of Trustees